

## Main specifications

| Parameters | Min | Typical | Max  | Units |
|------------|-----|---------|------|-------|
| Frequency  | DC  | ~       | 3    | GHz   |
| VSWR       |     |         | 1.25 |       |
| Loss       | 5.2 | 5.7     | 6.2  | dB    |


## Other parameters

|                    |                            |
|--------------------|----------------------------|
| Power Capacity     | 2W Design assurance        |
| Connector          | N -J(50Ω)/N-K(75Ω)         |
| Connector material | Stainless steel            |
| Operation Temp.    | -40~+85°C Design assurance |

## Reference picture



## Configuration(mm)

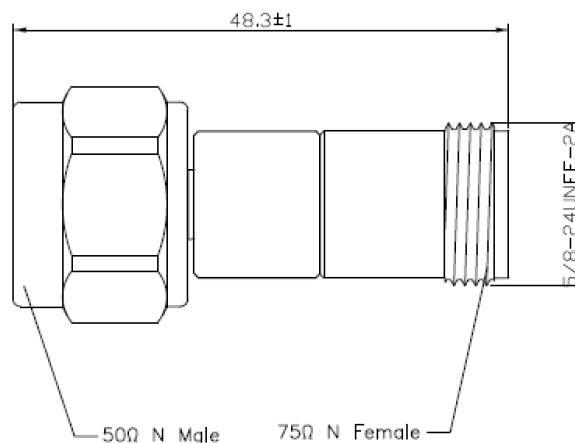

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.