

Product features

宽频带，一致性高。

Reference picture




Main specifications

Parameters	Min	Typical	Max	Units
Working frequency 1	0.8	~	2	GHz
Working frequency 2	2	~	18	GHz
Gain 1		0		dBi
Gain 2		0		dBi
VSWR		2		
3dB Beamwidth		60°*60		°

Other parameters

Polarization	Right-handed circular polarization
Power Capacity	0.5W Design assurance
Connector	SMA-K
Outline size	1100*330*135mm
Estimated weight	10Kg
Surface	RAL7035烤漆喷三防
Operation Temp.	-25~+55°C Design assurance
Storage Temp.	-40~+75°C Design assurance

Configuration(mm)

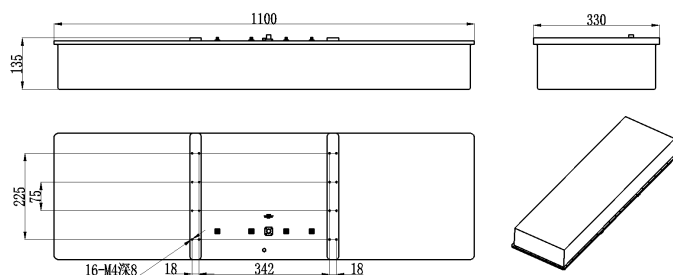

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Avoid collisions during installation.

It is strictly prohibited to disassemble antenna accessories, as it may cause poor antenna performance.

The installation position of the antenna should be free of any obstacles.

Outdoor use should be equipped with lightning protection facilities.

May contain electronic components, please do not dispose of them randomly.