

tech specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	40	GHz
IL			8	dB
Isolation	50			dB
VSWR			2.5	


Other parameters

Switch way	6*8
Control	RJ-45
Switching characteristic	Reflective switch
Switch time	20ms
Connector	2.92-K
Connector material	Stainless steel
Power	5W Design assurance
Product shell material	Aluminium
Working voltage	+220V
Work Temp.	-35~+65°C Design assurance
Quality Grade	Industrial grade
Switching Lifetime	1 million Cycles

Reference picture



Configuration(mm)

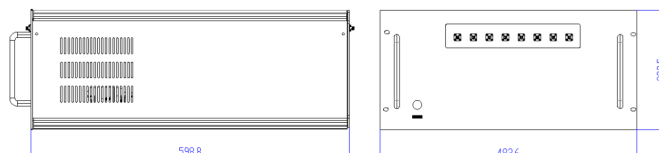

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.