


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	25	~	28	GHz
IL			0.3	dB
Isolation	18			dB
Input VSWR			1.3	
Output VSWR			1.25	
Amplitude balance			0.2	dB
Phase balance			8	°

Other parameters

Power	100W Design assurance
way	2-way
Phase	0°
Connector	Waveguide
Waveguide port	BJ260
Surface	Grey
Product shell material	Copper
Work Temp.	-40~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

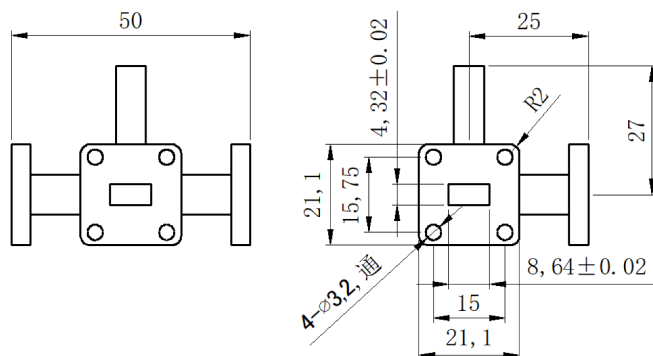

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.