


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
-3dB BW	/	/	18890	~	19800	MHz
Center loss	/	/			0.6	dB
Ripple	/	/			0.3	dB@19100M-19590M
Rejection	DC-18400	MHz $\geq$	45			dBc
Rejection	20290-32000	MHz $\geq$	42			dBc
Passband VSWR	/	/			1.3	

Configuration(mm)

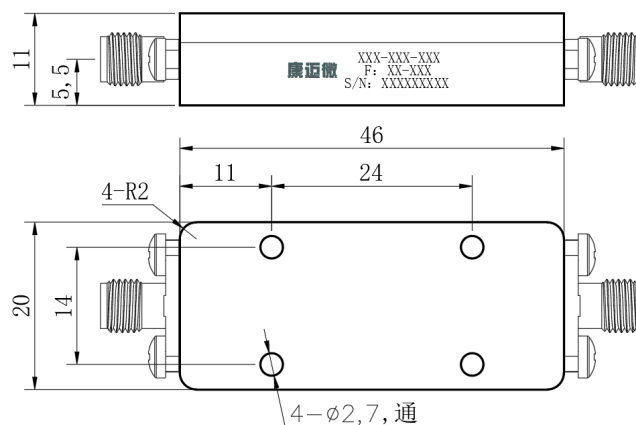

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	SMA-K detachable, Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Product shell material	Aluminium
Delay ripple	$\leq$ 0.3ns@19100M-19590M
Operation Temp.	-40~+70°C Design assurance
Other	/