


Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		3690	~	3710	MHz
Stopband Rej.	$\geq$	40			dB
Passband		DC	~	3685	MHz
Passband		3715	~	6000	MHz
Passband IL				5.5	dB
Passband VSWR				1.8	


Other parameters

Connector	SMA-F or K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	10W Design assurance
Operation Temp.	0~+40°C Design assurance
Quality Grade	Industrial grade

Functional diagram

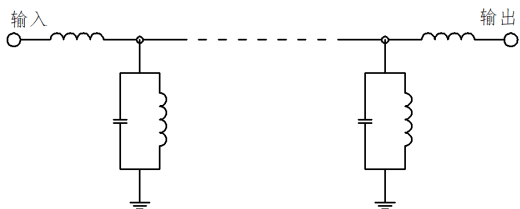

Configuration(mm)

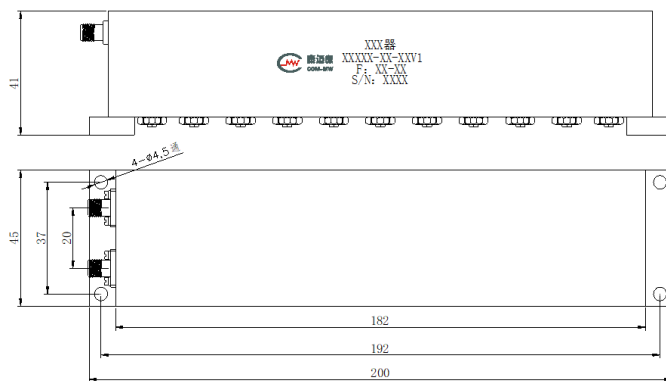

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.