


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	4700	~	4800	MHz
Passband IL	/	/			5	dB
Ripple	/	/			2	dB
Rejection	DC-3700	MHz $\geq$	70			dBc
Rejection	3700-4200	MHz $\geq$	65			dBc
Rejection	5200-5400	MHz $\geq$	30			dBc
Rejection	5400-7600	MHz $\geq$	40			dBc
Rejection	7600	MHz $\geq$	70			dBc
Passband VSWR	/	/			1.8	

Reference picture




Configuration(mm)

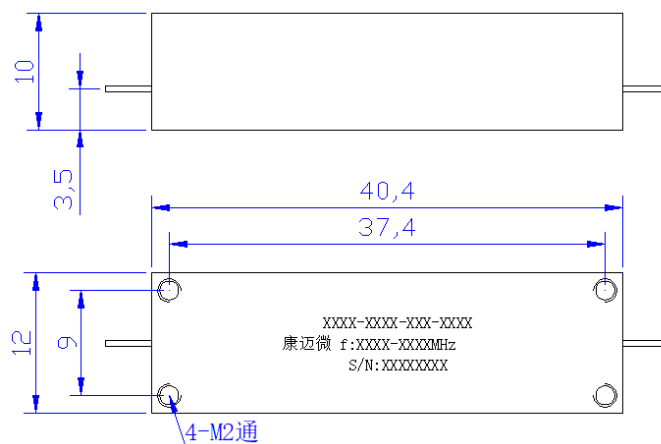


Other parameters

Connector	Pin 0.5mm
Surface	silver-plate
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Functional diagram

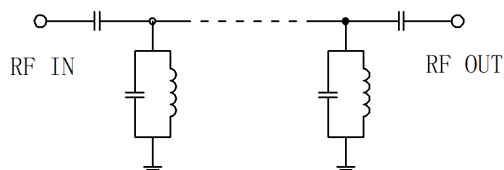

Typical test curve

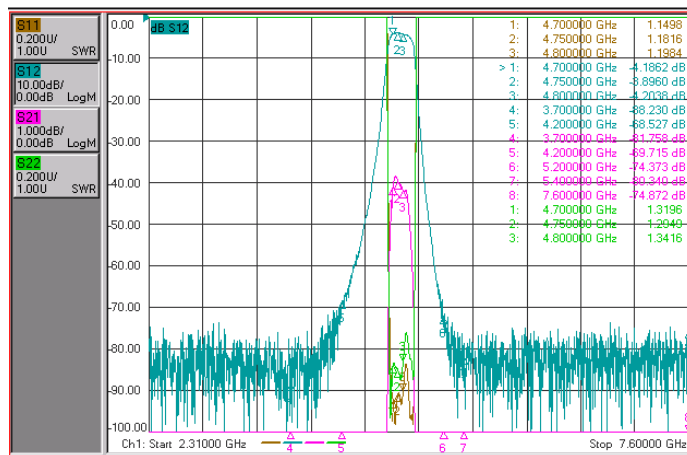

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.