


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2190	~	2310	MHz
Passband IL	/	/			1	dB
Ripple	/	/			0.5	dB
Rejection	DC-2100	MHz $\geq$	60			dB
Rejection	2400-4000	MHz $\geq$	60			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	0.5mm针
Impedance	50 Ω
Surface	Silver plating
Delay ripple	$\leq 0.7\text{ns}$ @ Passband Arbitrarily 1MHz
Work Temp.	-40~+70 $^{\circ}\text{C}$

Configuration(mm)

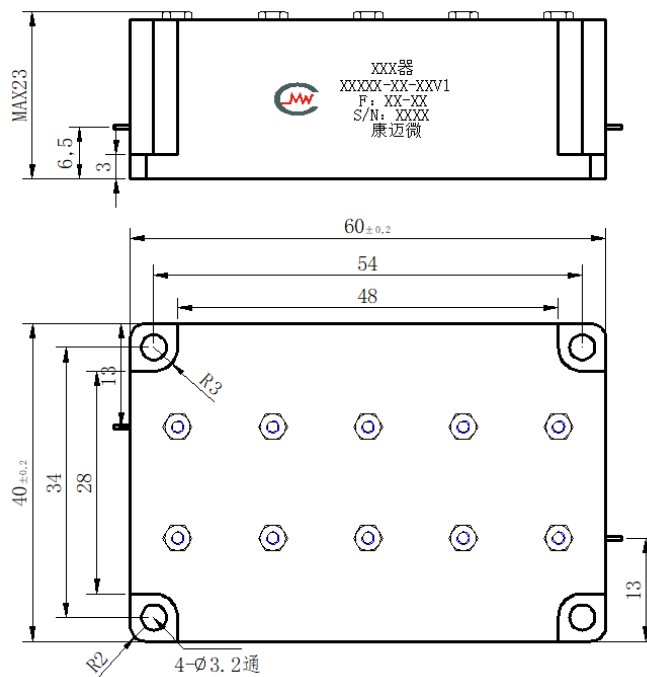

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.