


## Main specifications

| Parameters       | Frequency | /     | Min  | Typical | Max  | Units |
|------------------|-----------|-------|------|---------|------|-------|
| Passband F1      | /         | /     | 969  | ~       | 1065 | MHz   |
| Passband F2      | /         | /     | 1113 | ~       | 1227 | MHz   |
| band 1 IL        | /         | /     |      |         | 3    | dB    |
| band 2 IL        | /         | /     |      |         | 3    | dB    |
| Passband ripple  | /         | /     |      |         | 1.5  | dB    |
| Passband VSWR    | /         | /     |      |         | 1.6  |       |
| Band 1 Rejection | 1113-1227 | MHz ≥ | 50   |         |      | dB    |
| band 2 Rejection | 969-1065  | MHz ≥ | 50   |         |      | dB    |

## Configuration(mm)

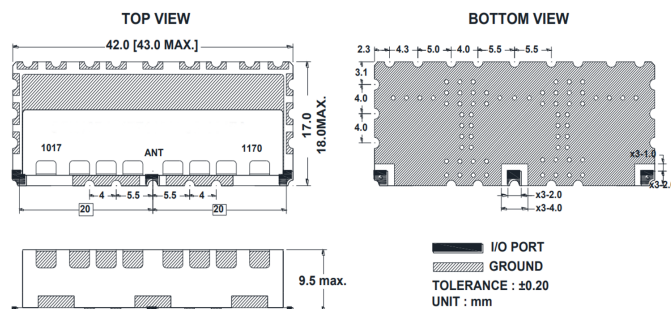

## Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- If the temperature is higher than 125°C, consult with us before ordering.

## Other parameters

|               |                            |
|---------------|----------------------------|
| Connector     | SMD                        |
| Impedance     | 50Ω                        |
| Power         | 2W Design assurance        |
| Work Temp.    | -40~+85°C Design assurance |
| Quality Grade | Industrial grade           |

## Port Definition

| 1 | Public Port | ANT  |
|---|-------------|------|
| 2 | Passband 1  | 1017 |
| 3 | Passband 2  | 1170 |
| 4 | GND         | ---  |