


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	30	MHz
IL			0.1	dB
Coupling	59	60	61	dB
Directivity	20			dB
Main line VSWR			1.10	
Coupled line VSWR			1.25	

Configuration(mm)

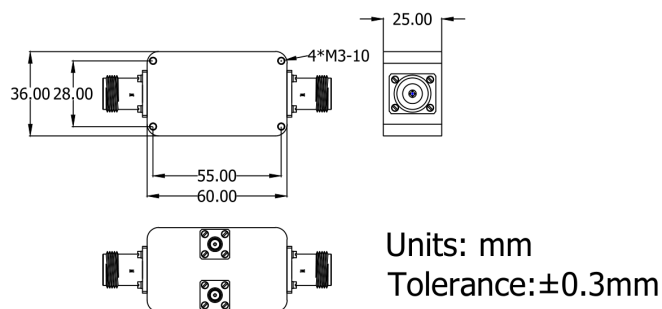

Other parameters

Connector	N -K@I/O Port
Connector	Coupling port SMA-F
Power Capacity	3000W Design assurance
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.