

Tech specifications

Parameters	Min	Typical	Max	Units
Frequency	22	~	28	GHz
IL		4.5		dB
Isolation	50	60		dB
VSWR		1.7	2	


Other parameters

Switch way	SP3T
Switching characteristic	Electronic reflective switch
Switch time	100ns
Connector	2.92-F detachable, Pin 0.3mm
Connector material	Stainless steel
Impedance	50Ω
Surface	Gold-plating
Power Capacity	0.2W Design assurance
Working voltage	±5V
Working current	150mA
Operation Temp.	-40~+85°C Design assurance

Port Definition

Common port	J0
Branching port	J1,J2,J3

Configuration(mm)

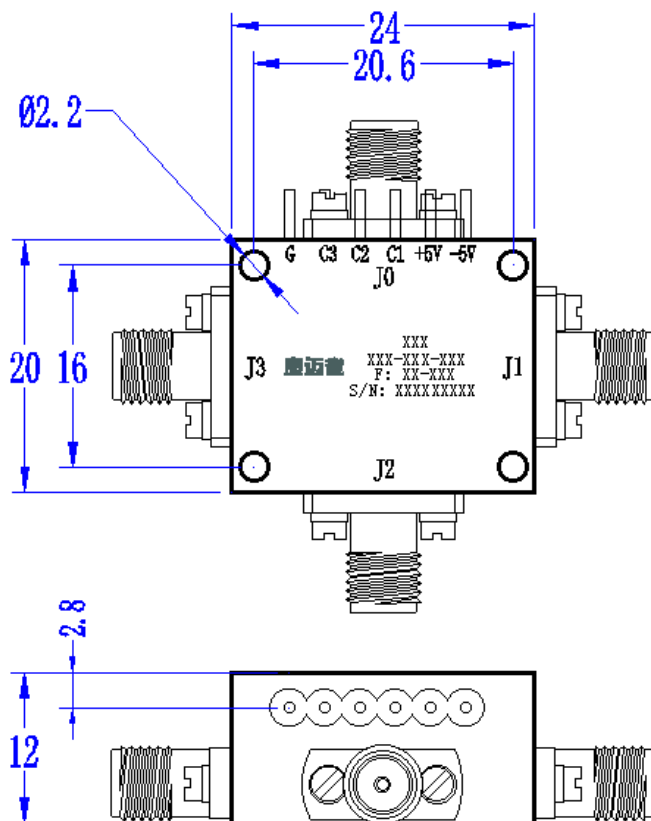

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.