

Product features

Low loss, high power.


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	99.5	~	99.5	GHz
Passband IL	/	/			2	dB
Passband VSWR	/	/			1.5	
Rejection	88	GHz $\geq$	70			dBc
Rejection	110	GHz $\geq$	70			dBc

Other parameters

Connector	Waveguide
Waveguide port	WR10
Waveguide flange	FUGP900
Work Temp.	-40~+85°C Design assurance

Configuration(mm)

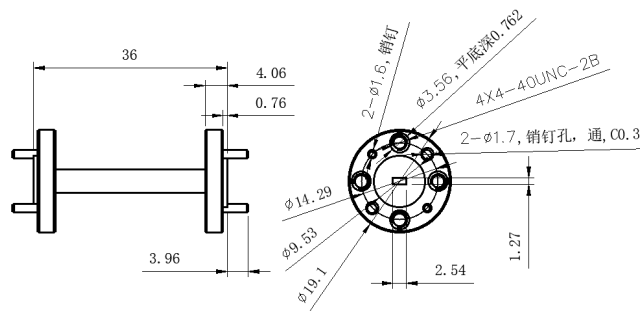

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

