

Main specifications

Parameters	Frequ ency	/	Min	Typi cal	Max	Units
Passband	/	/	1200	~	1400	MHz
Passband IL	/	/			1.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-1	GHz $\geq$	40			dB
Rejection	1.5-1.6	GHz $\geq$	60			dB
Rejection	1.6-1.7	GHz $\geq$	75			dB
Passband VSWR	/	/			1.50	


Other parameters

Connector	TNC-MF
Impedance	50 Ω
Surface	silver-plate
Power Capacity	20W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-50~+85°C Design assurance

Reference picture



Configuration(mm)

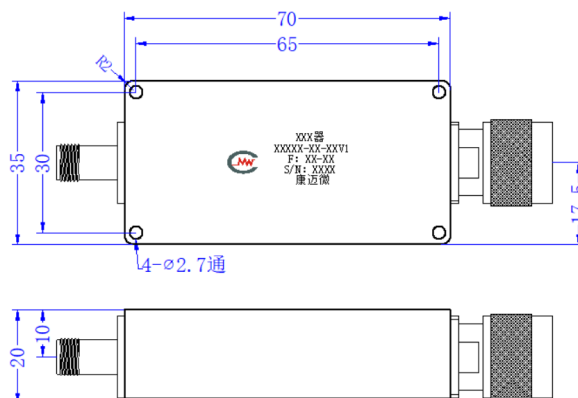

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/