


Main specifications

Parameters	Freq uenc y	/	Mi n	Typ ical	Ma x	Un its
Passband	/	/	20 00	~	190 00	MH z
Passband IL	/	/			1.4	dB
Rejection	DC- 1600	MH z $\geq$	45			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	White
Power	2W Design assurance

Configuration(mm)

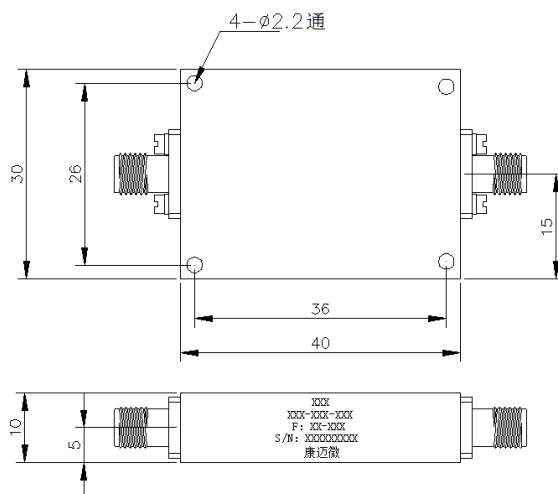

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.