

Product features

Low noise, high gain, 220V power supply.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1800	~	2200	MHz
Gain	60		65	dB
Gain flatness			± 0.5	dB
Noise figure			0.7	dB
VSWR			2	
P-1dB	10			dBm


Other parameters

Connector	SMA-K detachable, Pin 0.38mm
Connector material	Stainless steel
Impedance	50 Ω
Surface	White
Working voltage	+220V
Working current	50mA
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade

Reference picture



Configuration(mm)

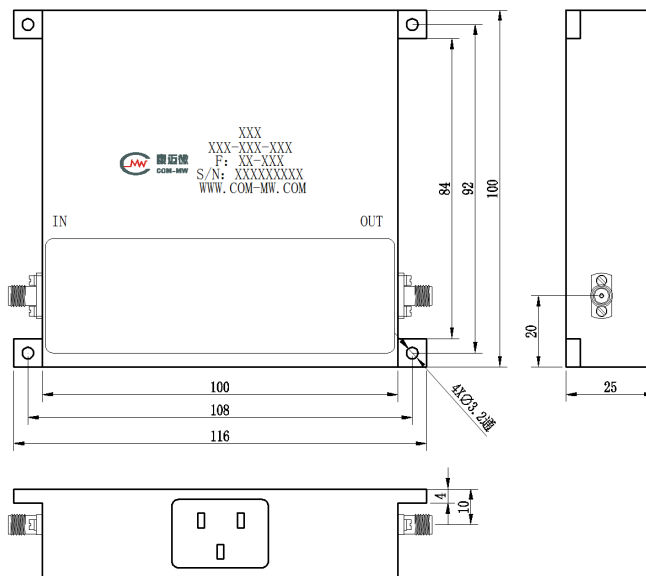

Note

Store in an environment with a humidity of less than 25% and pay attention to dust and static electricity prevention.

If the amplifier is connected to the antenna, electrostatic protection or isolation measures should be taken.