

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	800	~	2000	MHz
IL			1.1	dB
Coupling	17	18	19	dB
Directivity	14			dB
Main line VSWR			1.3	
Coupled line VSWR			1.5	



Other parameters

Connector	SMA-K
Connector material	Stainless steel
Impedance	50Ω
Surface	White
Power Capacity	3W
Shell Material	Aluminium
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-55~+100°C Design assurance
Quality Grade	Industrial grade
Other	代替ZNDC-18-2G-S+


表格标题

Input port	1	---
Output port	2	---
Coupling port	3	---

Configuration(mm)

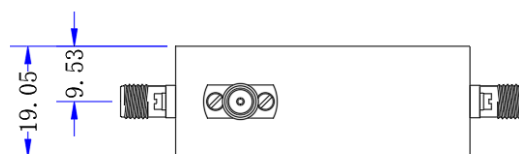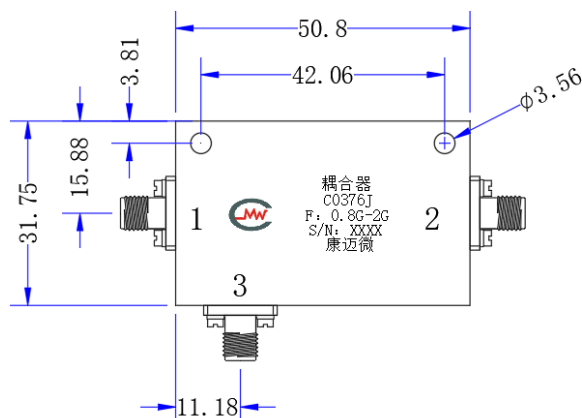

Tolerance: $\pm 0.3\text{mm}$

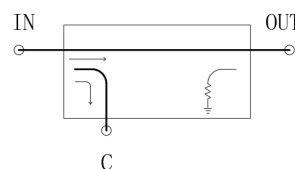

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.