


Main specifications

Parameters	Frequency		Min	Typical	Max	Units
Passband	/	/	23.32	~	25.75	GHz
Passband IL	/	/			3.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-13	GHz $\geq$	60			dBc
Rejection	34.5-38.6	GHz $\geq$	60			dBc
Passband VSWR	/	/			1.50	
Return loss	/	/				dB

Reference picture




Configuration(mm)

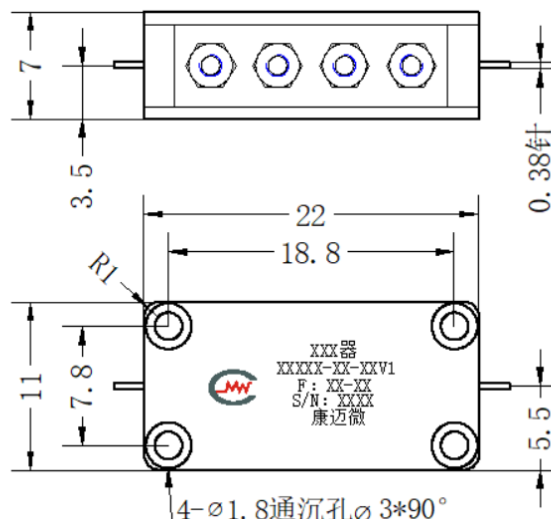

Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Absolute delay variation	$\leq$ 1ns@24h
Delay ripple	$\leq$ 1ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

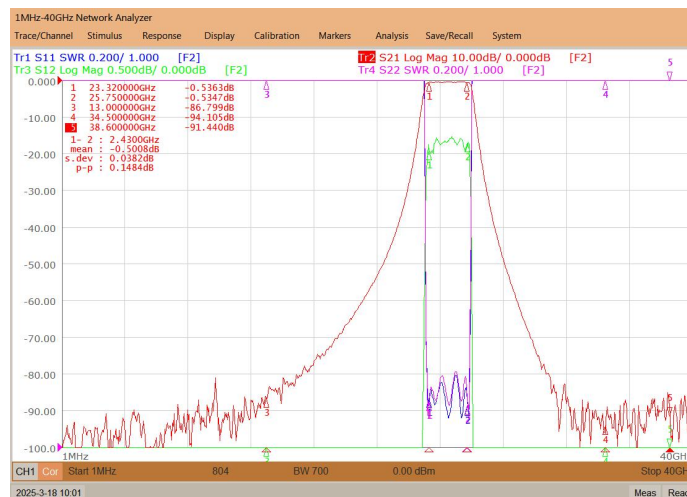

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /