


Main specifications

Parameters	Freq uenc y	/	Mi n	Typ ical	Ma x	Un its
Passband	/	/	D C	~	30 00	MH z
Passband IL	/	/			1.4	dB
Rejection	3500- 6800	MH z $\geq$	55			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50 Ω
Surface	White
Power Capacity	2W Design assurance

Configuration(mm)

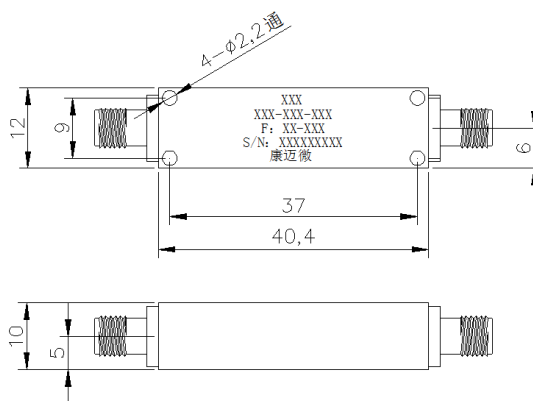

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.