


## Main specifications

| Parameters       | Frequency | /          | Min | Typical | Max | Units |
|------------------|-----------|------------|-----|---------|-----|-------|
| Passband         | /         | /          | 350 | ~       | 525 | MHz   |
| Passband IL      | /         | /          |     |         | 2   | dB    |
| Flatness in band | /         | /          |     |         | 1   | dB    |
| Rejection        | DC-200    | MHz $\geq$ | 70  |         |     | dB    |
| Rejection        | 700-4000  | MHz $\geq$ | 70  |         |     | dB    |
| Passband VSWR    | /         | /          |     |         | 1.8 |       |

## Configuration(mm)

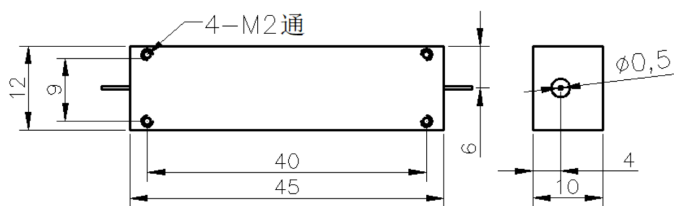

## Other parameters

|                 |                            |
|-----------------|----------------------------|
| Connector       | 微带针 $\varnothing$ 0.5mm    |
| Impedance       | 50 $\Omega$                |
| Surface         | silver-plate               |
| Power Capacity  | 5W Design assurance        |
| Operation Temp. | -40~+70°C Design assurance |

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.