

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	300	~	3000	MHz
Clipping level			14	dBm
IL			0.6	dB
VSWR			1.4	
recovery time			10	ns


Other parameters

Power	10W Design assurance
Impedance	50Ω
Connector	SMA-K
Connector material	Stainless steel
Product shell material	Aluminium
Work Temp.	-40~+85°C Design assurance

Reference picture



Configuration(mm)

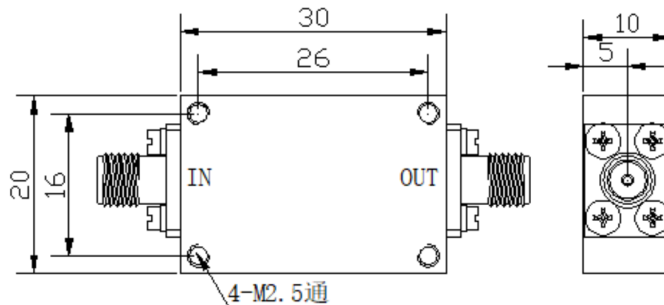

Note

1, Pay attention to the direction of input and output, reverse connection may cause the product to burn out.