

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2697.5	~	2722.5	MHz
Passband IL	/	/			3.5	dB
Ripple	/	/			0.5	dB
Rejection	F0±60	MHz≥	60			dBc
Rejection	DC-2	GHz≥	75			dBc
Rejection	3.4-7.6	GHz≥	75			dBc
Passband VSWR	/	/			1.3	


Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Delay ripple	≤5.5ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

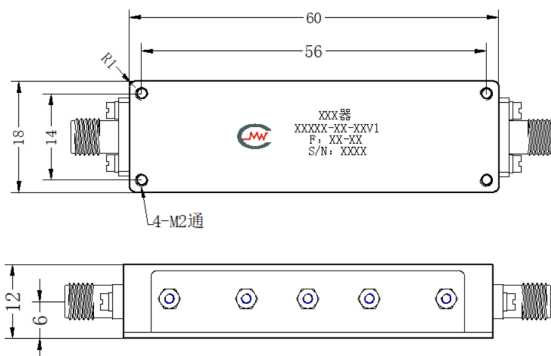

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.