


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7888	~	7908	MHz
Passband IL	/	/			6.5	dB
Ripple	/	/			1.0	dB
Rejection	$F_0 \pm 90$	MHz $\geq$	80			dBc
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMA-K detachable, Pin 0.38mm
Impedance	50Ω
Surface	Silver plating
Power	2W Design assurance
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

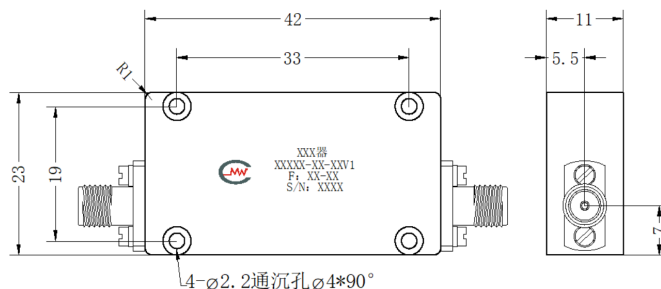

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.