


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5124	~	5624	MHz
Passband IL	/	/			2.0	dB
Ripple	/	/			0.5	dB
Rejection	6324-7524	MHz ≥	75			dBc
Rejection	7774	MHz ≥	85			dBc
矩形系数	BW50dB / BW3dB				1.8	
Passband VSWR	/	/			1.35	
Return loss	/	/				dB

Reference picture




Configuration(mm)

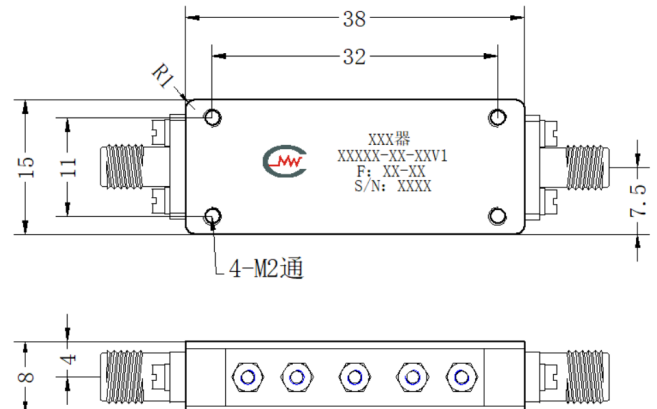

Other parameters

Connector	SMA-K detachable, Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Delay ripple	≤ 3ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

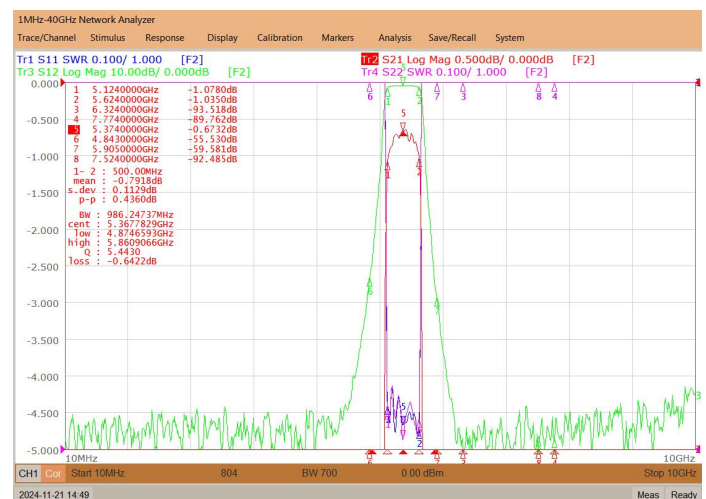

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.