


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	4.78	~	5.08	GHz
Passband IL	/	/			1.8	dB
Ripple	/	/			1.0	dB
Rejection	DC-4.33	GHz $\geq$	60			dB
Rejection	5.53-9.0	GHz $\geq$	60			dB
Passband VSWR	/	/			1.60	

Other parameters

Connector	SMA-F or K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

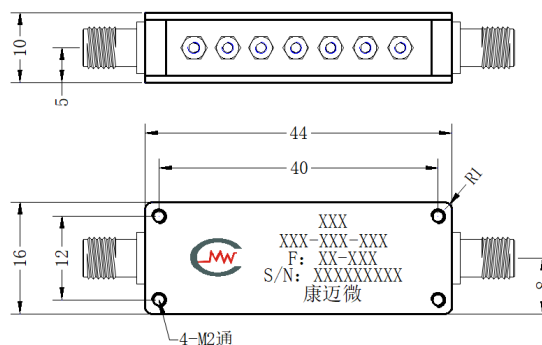

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /