


Product features

Broadband, high-power.

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2000	~	8000	MHz
Passband IL	/	/			2	dB
Ripple	/	/				dB
Rejection	DC-1200	MHz ≥	60			dB
Passband VSWR	/	/			1.8	
Return loss	/	/				dB

Configuration(mm)

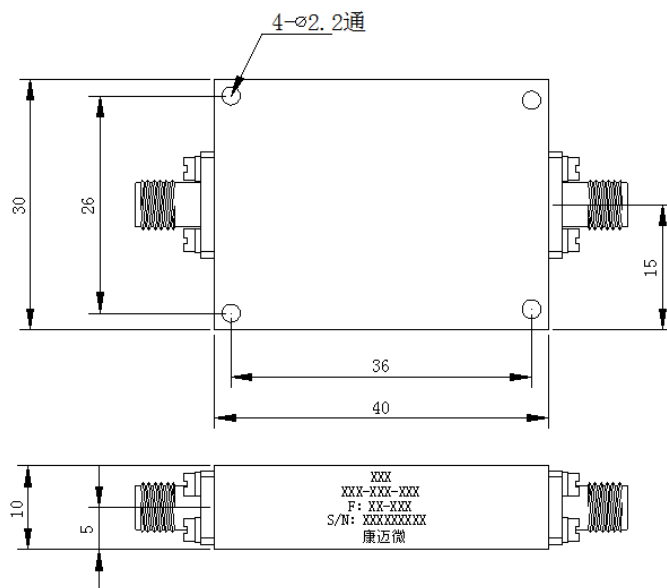

Other parameters

Connector	SMA-K
Connector material	Housing 304 stainless steel
Impedance	50Ω
Surface	White
Power Capacity	10W Design assurance
Operation Temp.	-20~+65°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.