


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	7700	~	8500	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.8	dB @ Full Band
Ripple	/	/			0.4	dB@任意 200MHz
Rejection	DC-4	GHz $\geq$	90			dBc
Rejection	5.5	GHz $\geq$	80			dBc
Rejection	9-18	GHz $\geq$	70			dBc
Passband VSWR	/	/			1.3	

Other parameters

Connector	SMA-K detachable, Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Delay ripple	$\leq$ 2.5ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade

Configuration(mm)

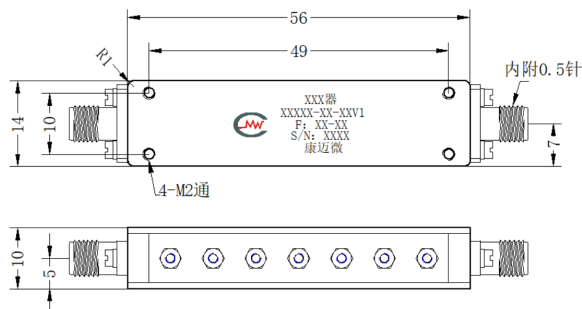

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.