

Product features

Broadband, high-power.


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	0	~	26.5	GHz
Attenuation	8.4	10	12	dB
VSWR			1.4	

Other parameters

Power Capacity	50W
Impedance	50Ω
Connector	SMA-JK
Connector material	Stainless steel
Surface	Black anodizing
Product shell material	Aluminium
Operation Temp.	-55~+125°C Design assurance
Other	When used at full power, additional air cooling is required.


Power Derating Curve

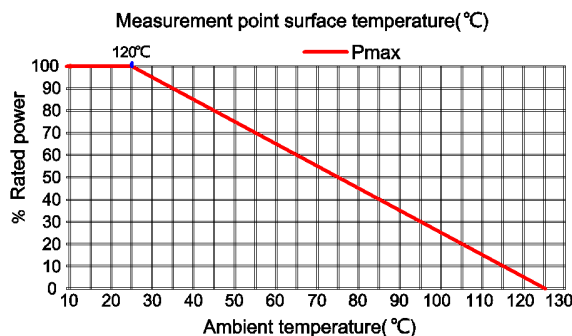

Reference picture



Configuration(mm)

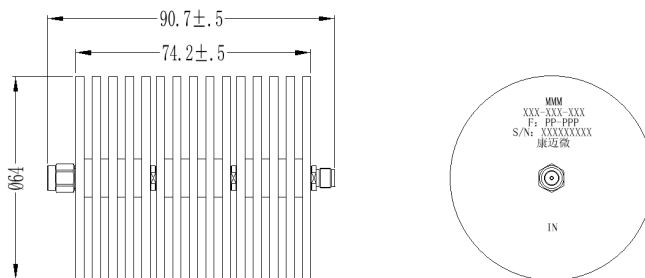

Note

When installing attenuators, sufficient heat dissipation space should be considered to avoid being installed next to equipment with high heat output.

Small power attenuators do not have input and output directions, nor do they indicate directions. When high-power attenuators have input and output port markings, connect devices in the specified direction.