


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5925	~	6125	MHz
Passband IL	/	/			1.3	dB
Ripple	/	/			0.6	dB
Rejection	6455-6655	MHz $\geq$	60			dBc
Rejection	6985-12250	MHz $\geq$	65			dBc
Rejection	DC-5400	MHz $\geq$	60			dB
Passband VSWR	/	/			1.5	


Reference picture



Configuration(mm)

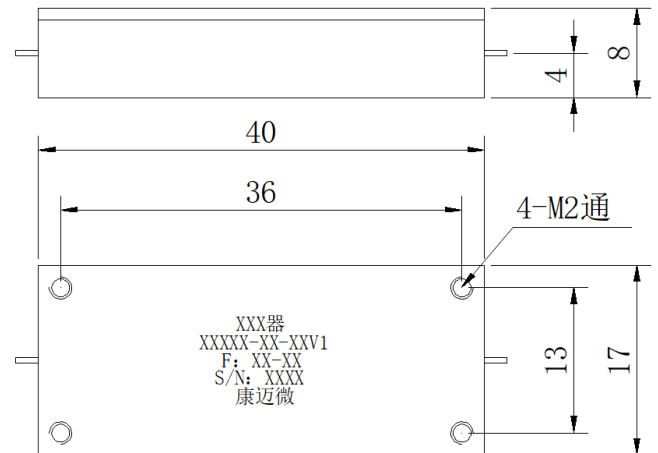


Typical test curve

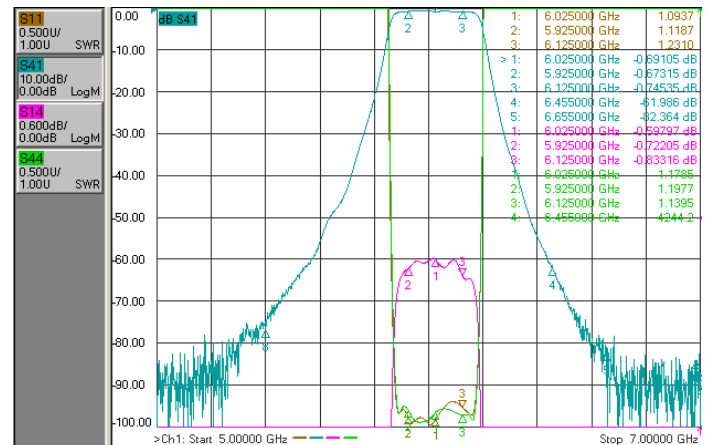

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Functional diagram

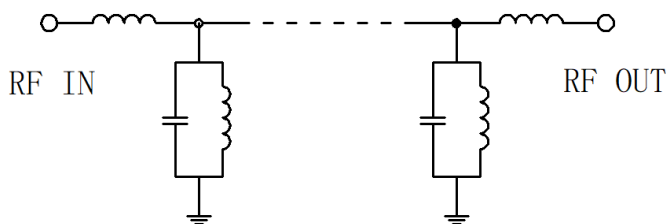

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.