


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2240	~	2400	MHz
Passband IL	/	/			1.5	dB
Rejection	1200-2200	MHz≥	80			dB
Rejection	2485-5800	MHz≥	80			dB
Passband VSWR	/	/			1.5	

Configuration(mm)

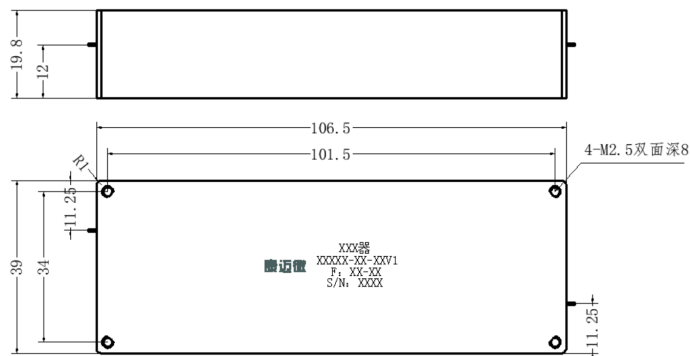

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	30W
Product shell material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance
Other	产品有密封要求；盖板封焊

Functional diagram

