


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	570	~	740	MHz
Center loss	/	/			1.50	dB
Ripple	/	/			1.50	dB
-1.5dB BW	/	/	170			MHz
Rejection	DC-370	MHz $\geq$	45			dB
Rejection	855-1200	MHz $\geq$	45			dB
Passband VSWR	/	/			1.80	


Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	1W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

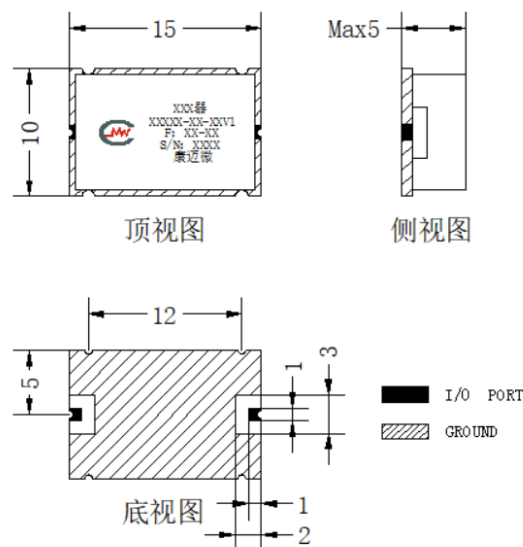

Typical test curve

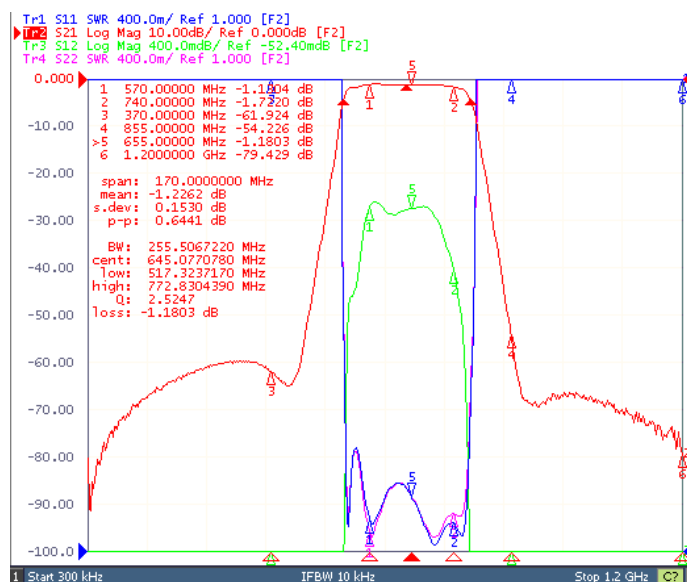

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- The product supports 220 °C reflow soldering.
- /

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.