


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2650	~	2875	MHz
Passband IL	/	/			0.6	dB
Ripple	/	/			0.3	dB
Rejection	2090	MHz $\geq$	90			dBc
Rejection	3200	MHz $\geq$	90			dBc
Passband VSWR	/	/			1.5	dB


Other parameters

Connector	
Surface	/
Power Capacity	50W
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-40~+85°C Design assurance

Configuration(mm)

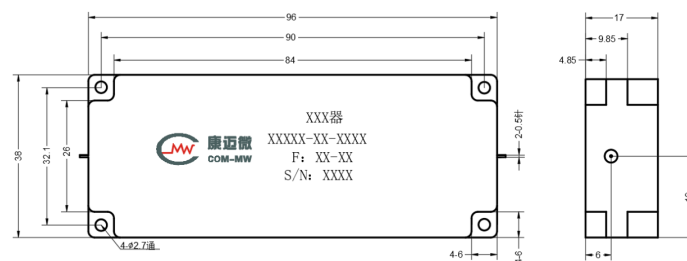

Typical test curve

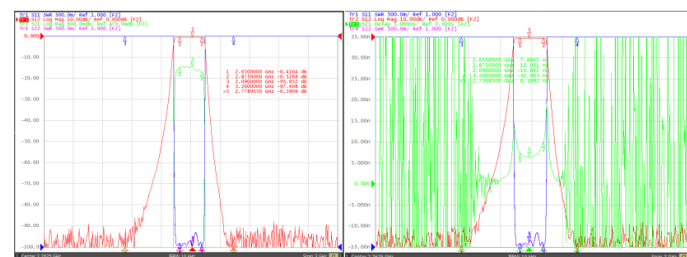

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.