


Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3.5	~	6.5	GHz
IL			1.5	dB
Isolation	15			dB
VSWR			1.5	
Amplitude balance			±0.4	dB
Phase balance			±5	°

Other parameters

Power	10W Design assurance
way	2-way
Phase	0°
Impedance	50Ω
Connector	SMA-K
Surface	Black baking paint
Product shell material	Aluminium
Work Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Other	Excluding allocation loss 3dB

Configuration(mm)

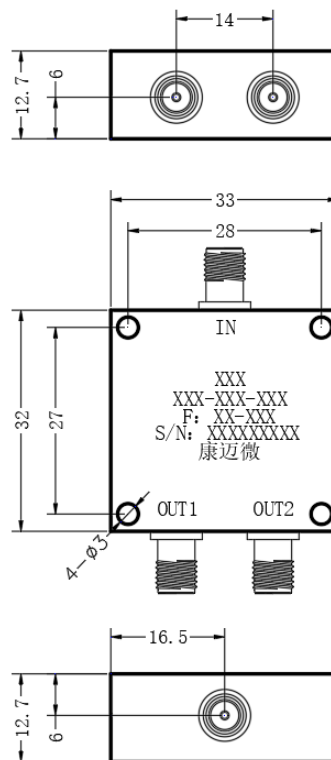

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.