


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	64.5	~	75.5	MHz
Passband IL	/	/			4.0	dB
Ripple	/	/			0.5	dB
Rejection	DC-50	MHz ≥	60			dBc
Rejection	90-3000	MHz ≥	60			dBc
Passband VSWR	/	/			1.5	
Return loss	/	/				dB

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Functional diagram

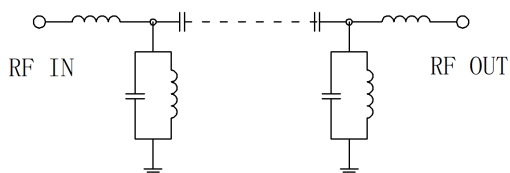


Reference picture



Configuration(mm)

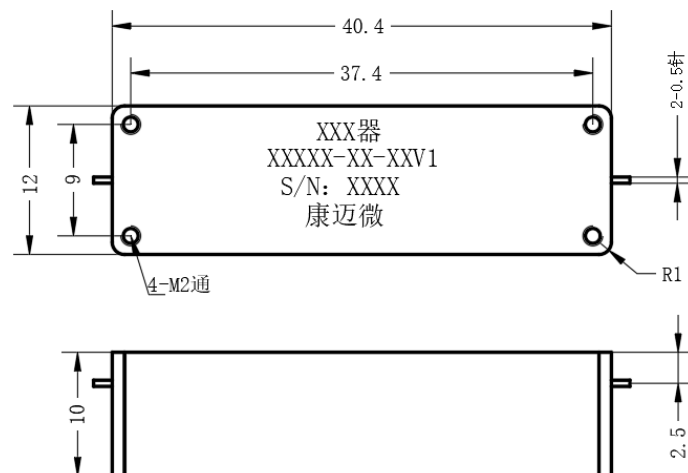

Typical test curve

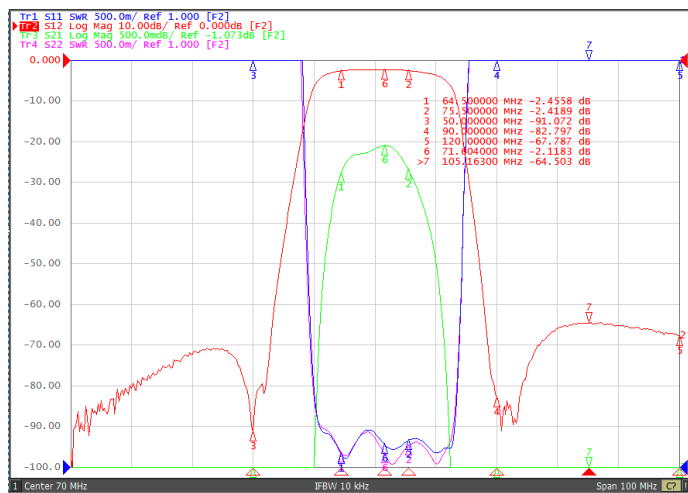

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.