

Product features

High performance, stable amplitude and phase cables, suitable for vector network analyzers.

Low VSWR, high reliability.

Main specifications

Items	Min	Type	Max	Units
Frequency	DC	~	26.5	GHz
IL			1.8	dB
VSWR			1.2	



Other parameters

Cable category	Paired use of two pieces
Length	630mm
Cable outer diameter	14.8mm
Impedance	50Ω
Operation Temp.	-30~+85°C Design assurance
Cable interface 1	NMD3.5-K&3.5-K
Cable interface 2	NMD3.5-K&NMD3.5-J


Reference picture



Configuration(mm)

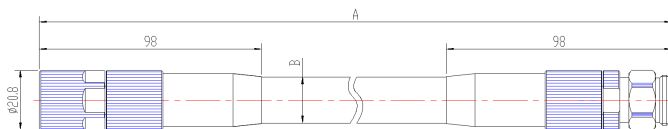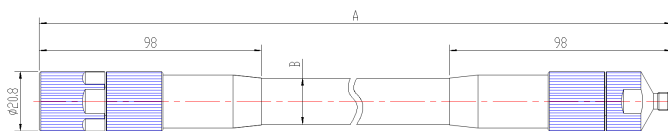


Cable structure diagram



Note

1	Suggest reusing radii greater than 36mm
2	Use standard Torque wrench for cable removal.

Typical test curve

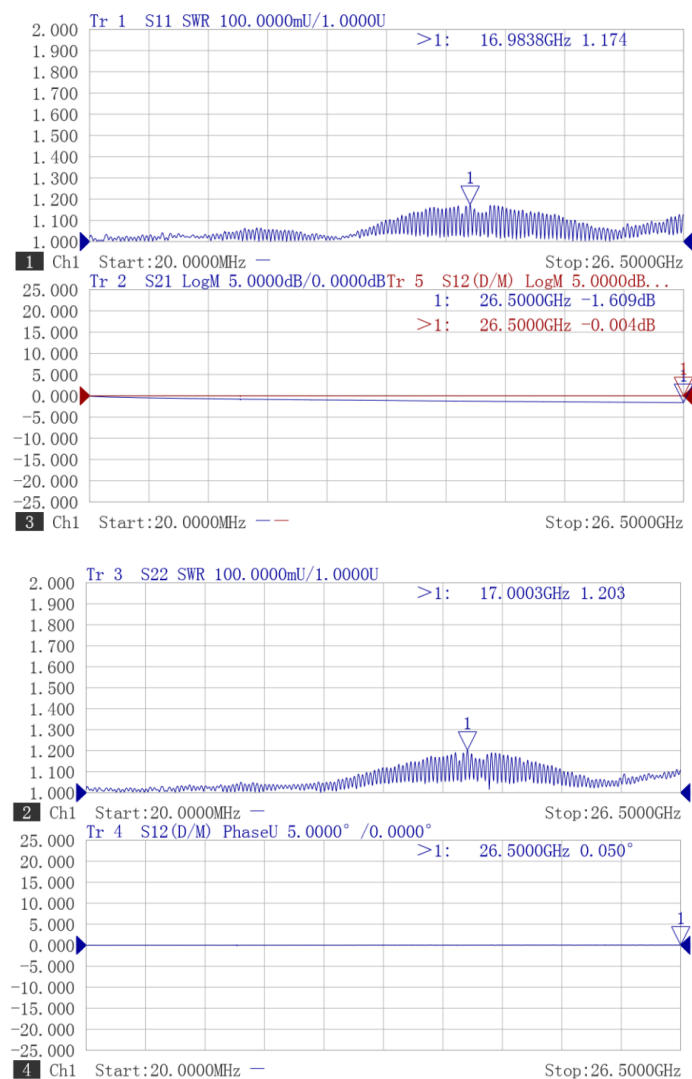

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.