


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1300	~	2300	MHz
Passband IL	/	/			3	dB
Ripple	/	/			2	dB
Rejection	DC-1200	MHz $\geq$	25			dB
Rejection	2400-4000	MHz $\geq$	25			dB
Passband VSWR	/	/			1.6	

Reference picture



Configuration(mm)

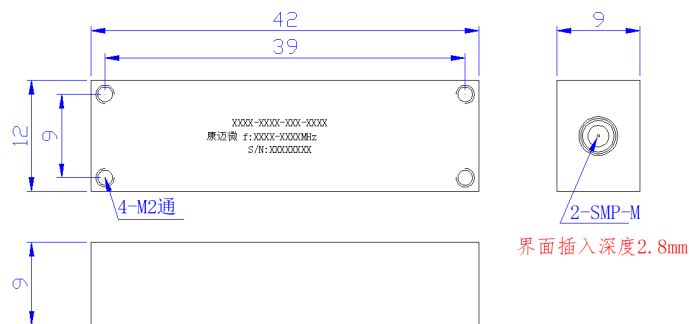


Other parameters

Connector	SMP-M semi escapement
Impedance	50 Ω
Surface	silver-plate
Power Capacity	3W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance
Quality Grade	Industrial grade


Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

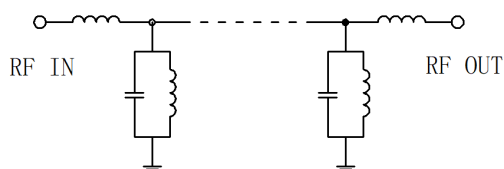

Typical test curve

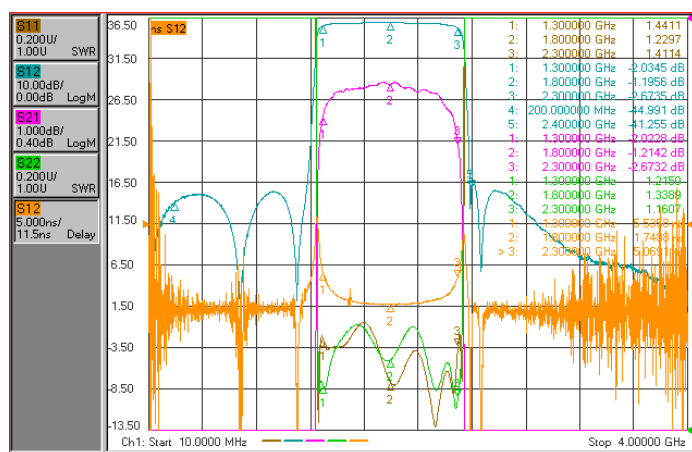

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.