


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	55	~	85	MHz
Passband IL	/	/			2.5	dB
Ripple	/	/			1.0	dB
Rejection	DC-42	MHz $\geq$	40			dBc
Rejection	98-500	MHz $\geq$	40			dBc
Passband VSWR	/	/			1.50	


Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

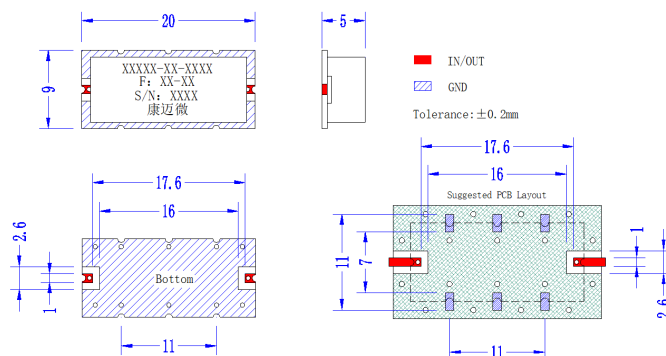

Typical test curve

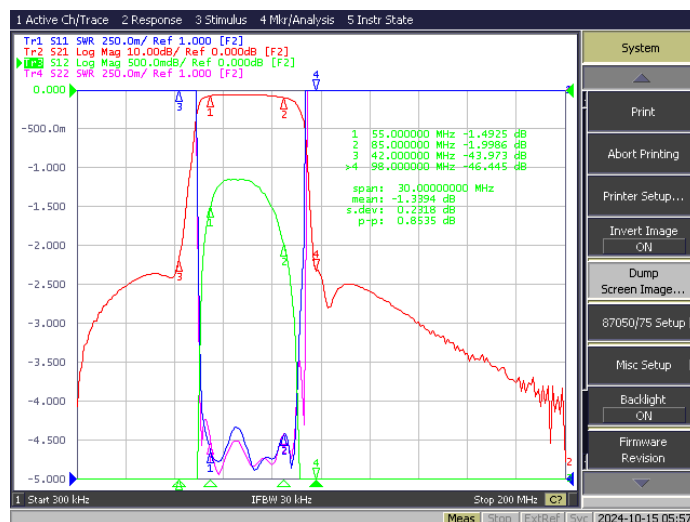

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- The product supports 190 °C reflow soldering