


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1100	~	3000	MHz
Passband IL	/	/			1.5	dB
Ripple	/	/			1.5	dB
Rejection	DC-928	MHz $\geq$	25			dBc
Passband VSWR	/	/			1.6	


Other parameters

Connector	SMD
Impedance	50 Ω
Power Capacity	1W Design assurance
Operation Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

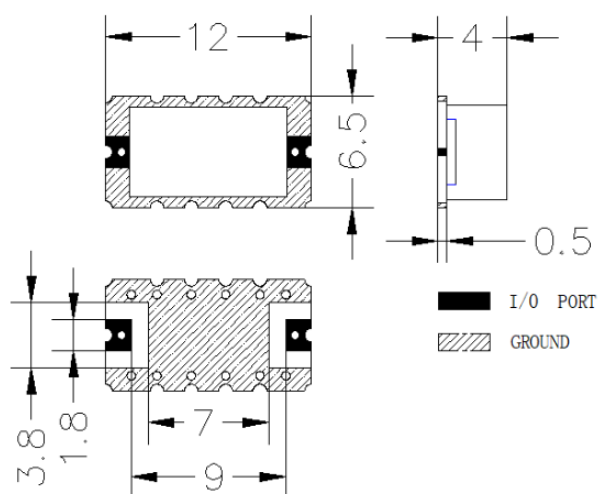

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	The product supports 220 °C reflow soldering.