

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1468	~	1532	MHz
Passband IL	/	/			5	dB
Ripple	/	/			1.2	dB
Rejection	1435	MHz ≥	45			dB
Rejection	1565	MHz ≥	45			dB
Passband VSWR	/	/			1.5	


Other parameters

Connector	SMD
Power	5W Design assurance
Work Temp.	-40~+85°C Design assurance

Reference picture



Configuration(mm)

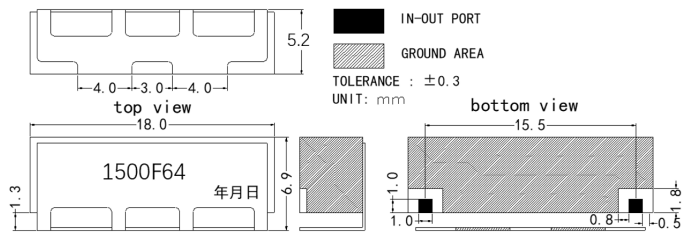

Note

1	Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.
2	The product supports 190 °C reflow soldering