


Main specifications

Parameters	Fre que ncy	/	Mi n	Ty pi ca l	M ax	U ni ts
Passband	/	/	25 00 0	~	31 50 0	M Hz
Passband IL	/	/			1. 5	dB
Ripple	/	/			1. 0	dB
Rejection	DC- 830 0	M Hz $\geq$	60			dB
Rejection	328 00- 500 00	M Hz $\geq$	30			dB
Passband VSWR	/	/			1. 5	

Reference picture



Configuration(mm)

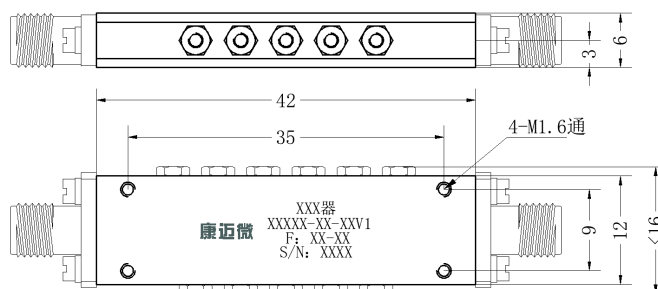

Other parameters

Connector	2.92-F
Connector material	Stainless steel
Impedance	50 Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Copper
Delay ripple	$\leq$ 0.4ns
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.