

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	6	~	18	GHz
IL			1.8	dB
Isolation	18	20		dB
Input VSWR			1.6	
Output VSWR			1.4	
Amplitude balance			± 0.5	dB
Phase balance			± 7	°

Other parameters

Power Capacity	15W
X-Way	16-way
Phase	0°
Impedance	50Ω
Connector	SMA-F
Surface	Conductive oxidation
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance
Quality Grade	Industrial grade


Port Definition

Common port	0
Dispatch Port	1-16

Reference picture



Configuration(mm)

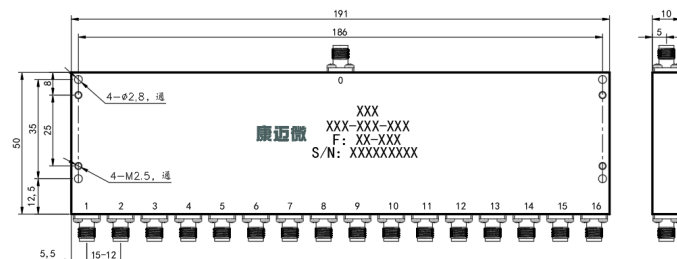

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.