

Product features

High precision machining technology

Low temperature drift, high power.

Ceramic substrate, 50 Ω coplanar waveguide

Gold wire bonding


Tech specifications

Items	Parameters	Units
Center Frequency	16.4	GHz
Bandwidth	14.6-18.1	GHz
Center loss	3.2	dB
Ripple	1.0	dB
VSWR	1.7:1	
Group delay ripple	0.4	ns
Rejection	40@DC-11.6GHz	dBc
Rejection	30@19.5-38.0GHz	dBc


Other requirement (Design assurance)

power	2W CW
Work Temp.	-55~+85°C
Storage Temp.	-55~+125°C
Outline size	L:7.0, W:3.0, h:0.26


Outline drawing: Port centered

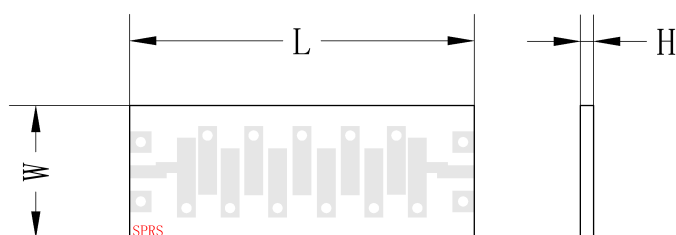

Schematic diagram

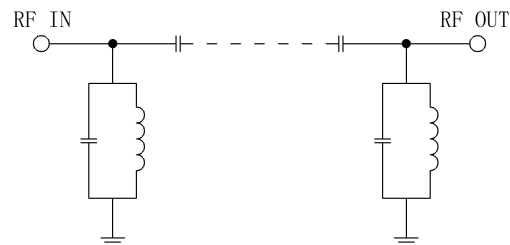




Typical test curve

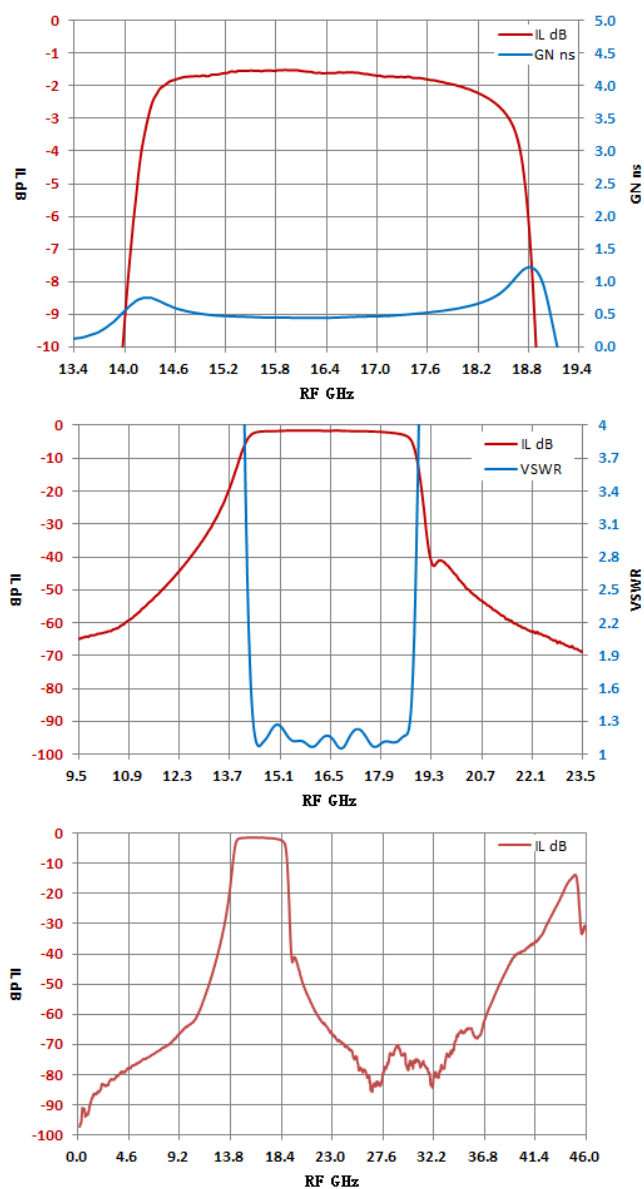

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Suggested PCB Layout

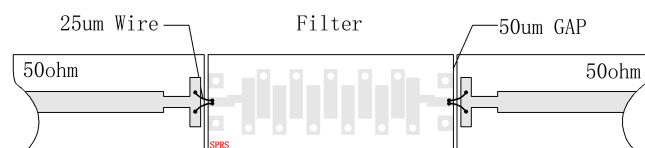

PCB Rogers5880, h: 0.254mm	PCB Rogers4350B, h: 0.254mm
 Dimensions for Rogers5880 PCB: 0.1, 0.55, 0.29, 0.63, 0.78, 2.1	 Dimensions for Rogers4350B PCB: 0.1, 0.28, 0.28, 0.7, 0.55, 1.3

Note

- 1: 0.1mm from the side wall, 2.75mm from the surface to the upper cover.
- 2: Suggest using conductive adhesive for bonding;
- 3: The chip should be installed on kovar alloy or molybdenum copper;
- 4: Suggest using a T-shaped structure for microstrip bonding.