

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	6	~	18	GHz
Passband IL	/	/			2.0	dB
Rejection	DC-5.6	GHz $\geq$	50			dBc
Rejection	19.5-20	GHz $\geq$	50			dBc
Passband VSWR	/	/			1.80	


Other parameters

Connector	SMA-MF or JK
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

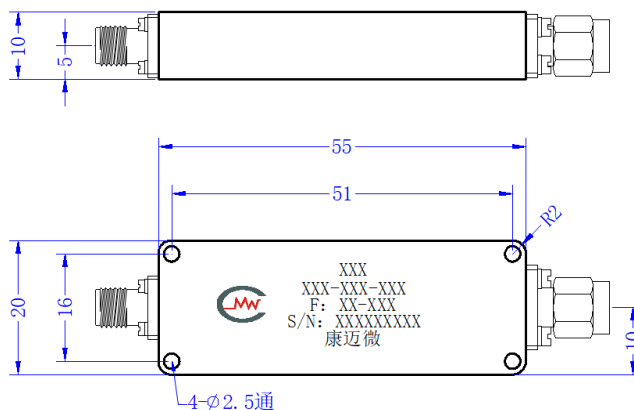

Typical test curve

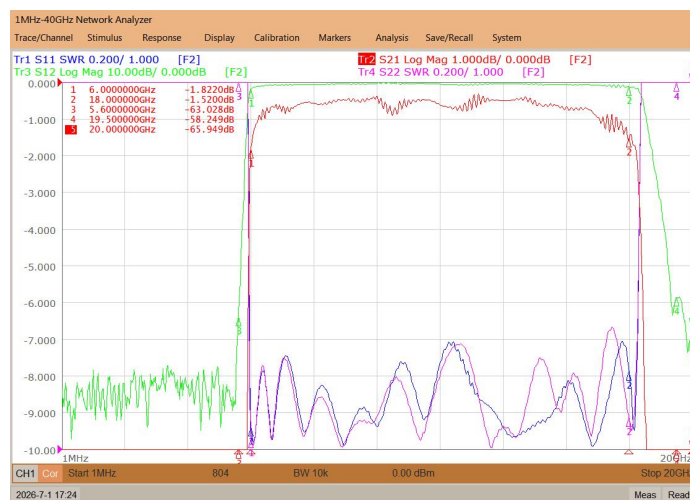

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.