

Characteristics and Application

Low temperature drift, high power.

Small size, easy to integrate.

Technical parameters superior to LTCC filters.

Applied in fields such as radar, electronic countermeasures, and mobile communication.


Tech specifications

Items	Parameters	Units
Center Frequency	2.55	GHz
Bandwidth	2.4-2.7	GHz
Center loss	2.5	dB
Ripple	1.0	dB
VSWR	1.7:1	
Group delay ripple	1.0	ns
Rejection	35@DC-2.08GHz	dBc
Rejection	40@3.2-9.2GHz	dBc

Reference picture




Schematic diagram

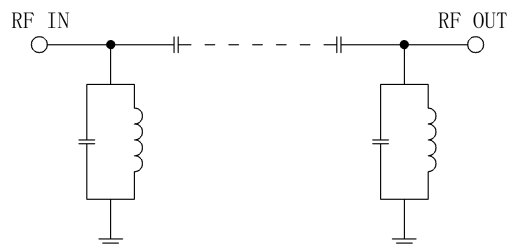


Other requirement (Design assurance)

power	5W CW
Operation Temp.	-55~+85°C
Storage Temp.	-55~+85°C

Configuration

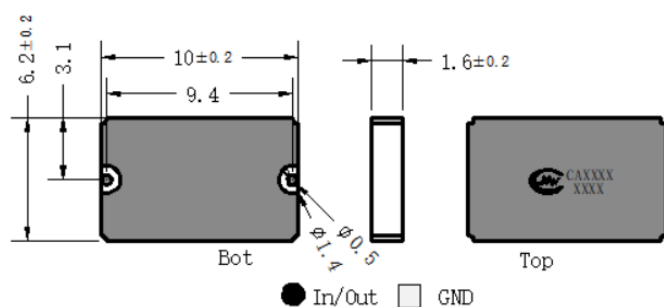

Suggested PCB Layout

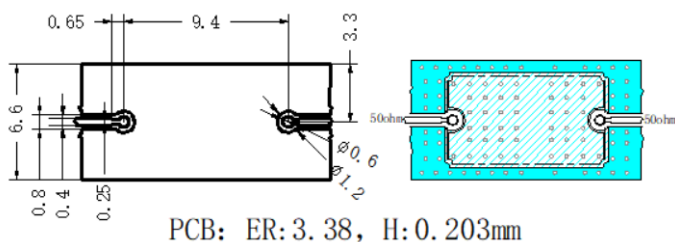


Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Note

- 1: Suggest using separate chambers with interchangeable ports, with a distance of 1.0mm from the side wall on one side and a distance of 2.0mm from the top cover on the surface. Supports reflow soldering at 260 °C;
- 2: Good grounding is necessary to maximize the performance of the filter.
- 3: During the cleaning process, the filter should not be immersed in the cleaning solution for a long time;
- 4: Filling absorbing material above the filter can achieve better harmonic suppression.

Typical test curve

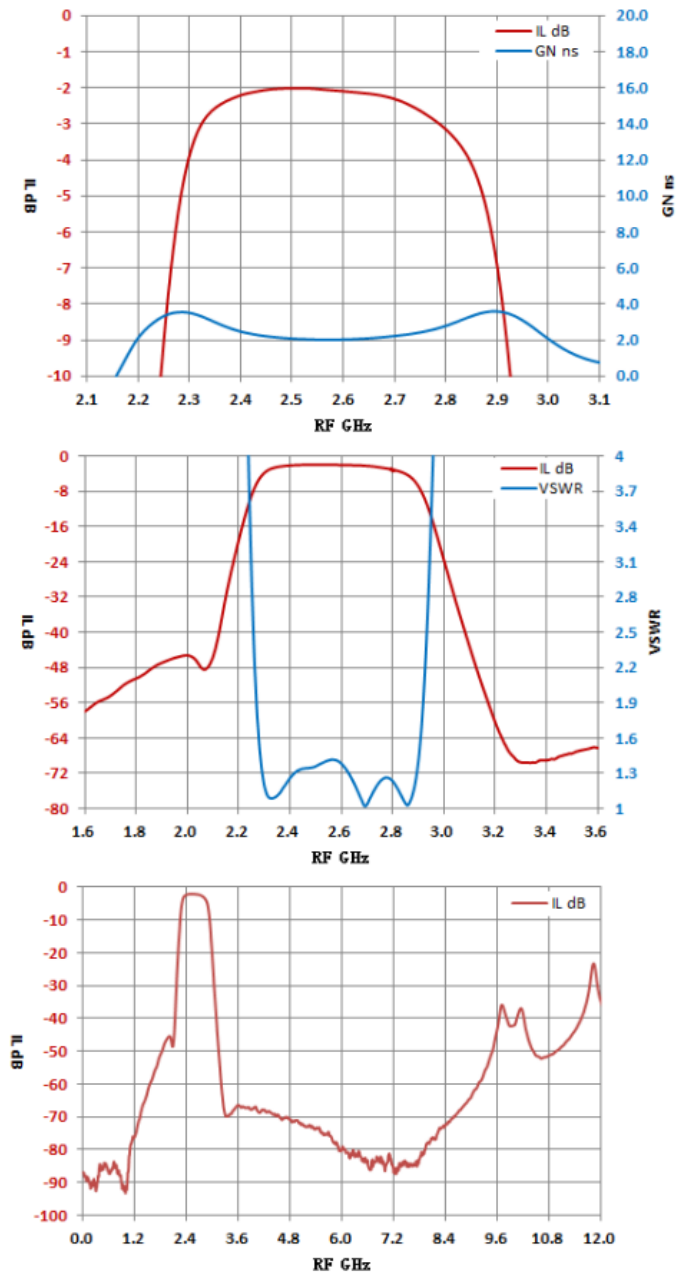

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.