


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	22	~	40	GHz
Passband IL	/	/			1.0	dB
Ripple	/	/			1.0	dB
Rejection	DC-18	GHz $\geq$	50			dBc
Rejection	18-20	GHz $\geq$	30			dBc
Rejection	42	GHz $\geq$	30			dBc
Rejection	43.5	GHz $\geq$	40			dBc
Passband VSWR	/	/			2.0	
Return loss	/	/				dB

Reference picture




Configuration(mm)

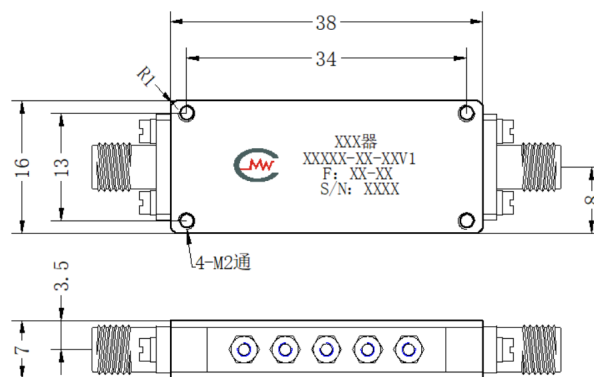

Other parameters

Connector	2.92-F detachable, Pin 0.3mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Typical test curve

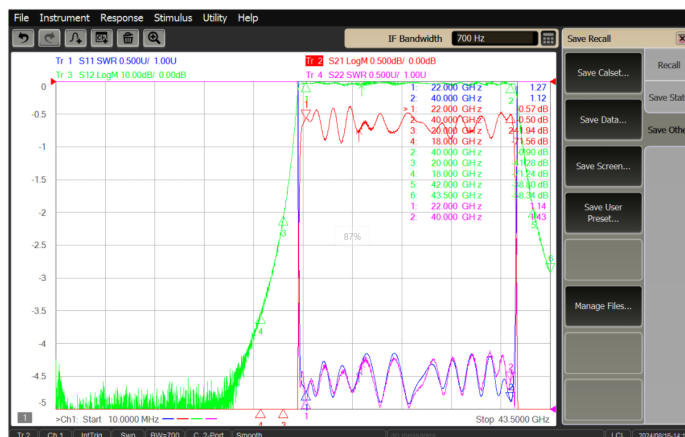

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.