

Product features

此非金属三脚架可双向伸缩三脚架，主体采用环氧玻璃纤维和PVC材料，以避免电磁波反射。主要应用于屏蔽室或暗室中场强测试。


Main specifications

Parameters	Min	Max	Units
Lifting height	1	1.8	m
Bearing	0	30	Kg

Other parameters

Connector	3/8 " Male Thread
外形尺寸1	900*492*285mm
外形尺寸2	666*240*100mm
外形尺寸3	512*131*100mm
估算重量1	3.2Kg
估算重量2	1.7Kg
估算重量3	0.8Kg
Operation Temp.	-25~+55°C Design assurance


低频天线三脚架

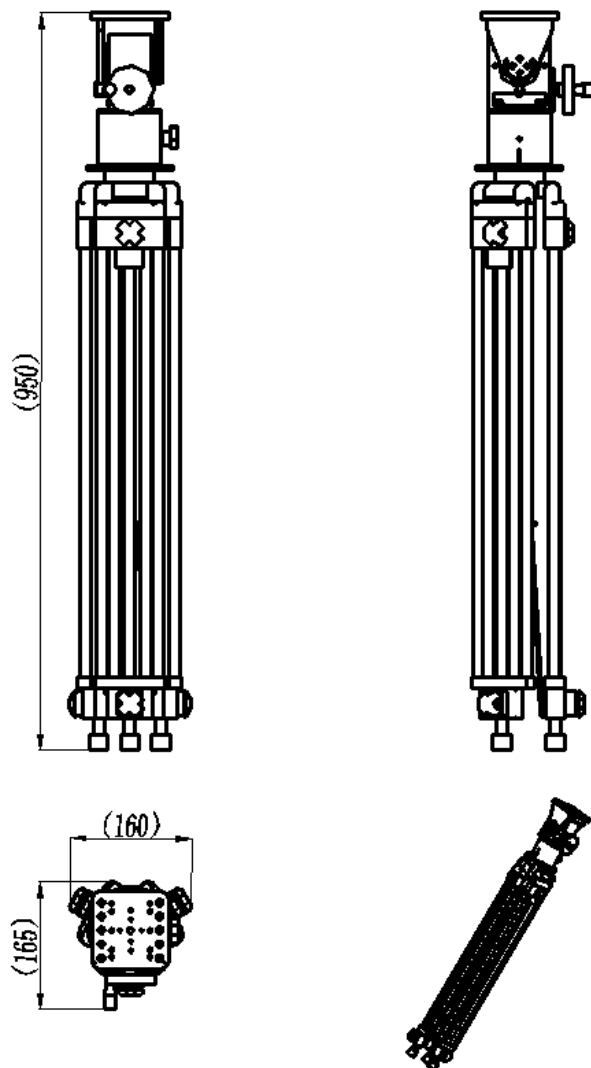


Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

Configuration(mm)

中频、高频天线三脚架

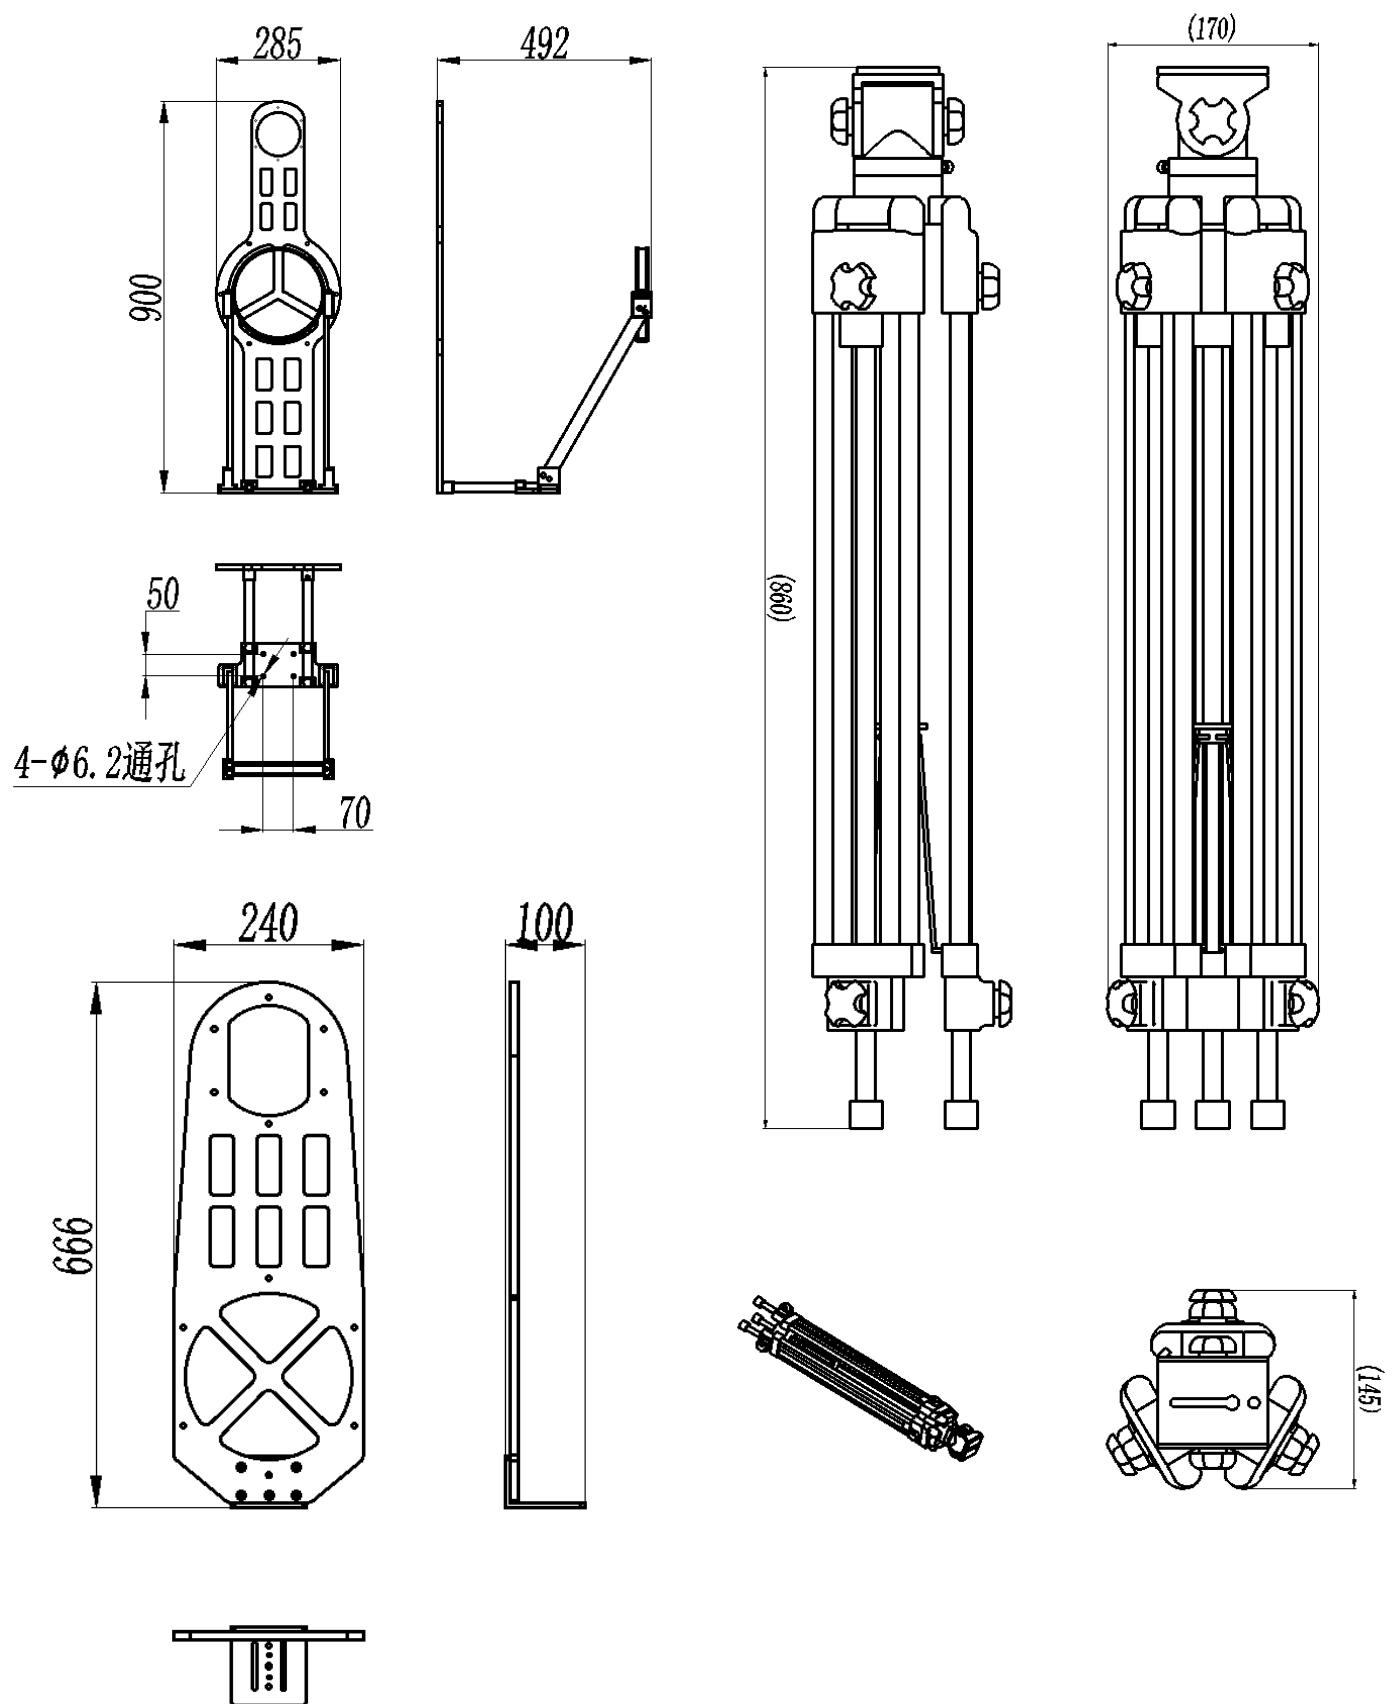

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.

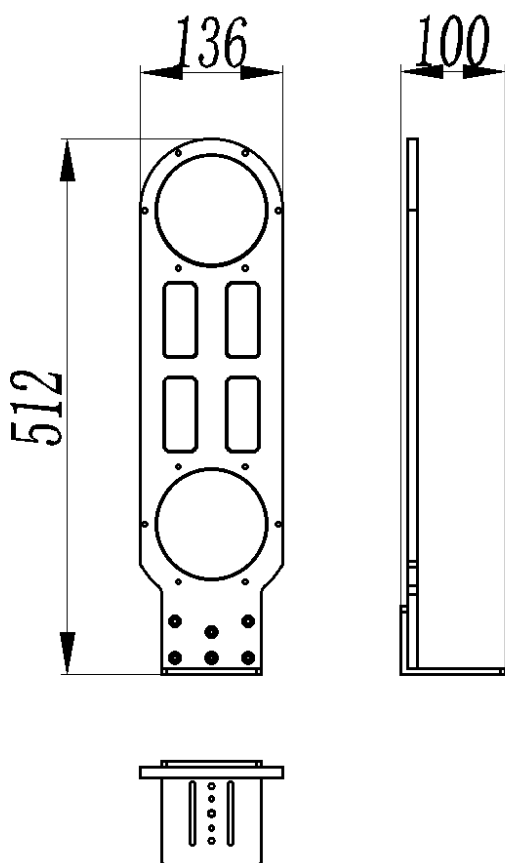

Note

Avoid collisions during installation.

The support rod should be perpendicular to the ground to prevent antenna damage.