


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	46 5	~	50 5	MH z
Passband IL	/	/			1.5	dB
Ripple	/	/			1	dB
Rejection	DC-425	MHz $\geq$	55			dB
Rejection	545- 2500	MHz $\geq$	55			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	SMP-J
Impedance	50 Ω
Surface	Conductive oxidation
Power Capacity	5W Design assurance
Operation Temp.	-55~+85°C Design assurance

Configuration(mm)

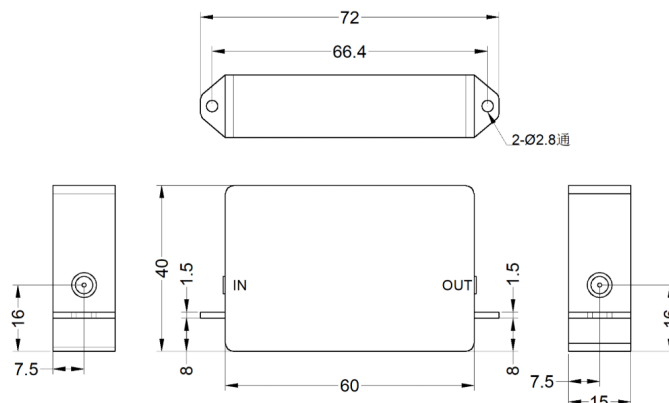

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.