


Main specifications

Parameters	Freq uency	/	Min	Ty pic al	M ax	Un its
Passband	/	/	29 50	~	34 10	M Hz
Passband IL	/	/			3.5	dB
Ripple	/	/			1.5	dB
Rejection	DC- 2850		20			dB c
Rejection	3550 -600 0		45			dB c
Passband VSWR	/	/			1.7	

Configuration(mm)

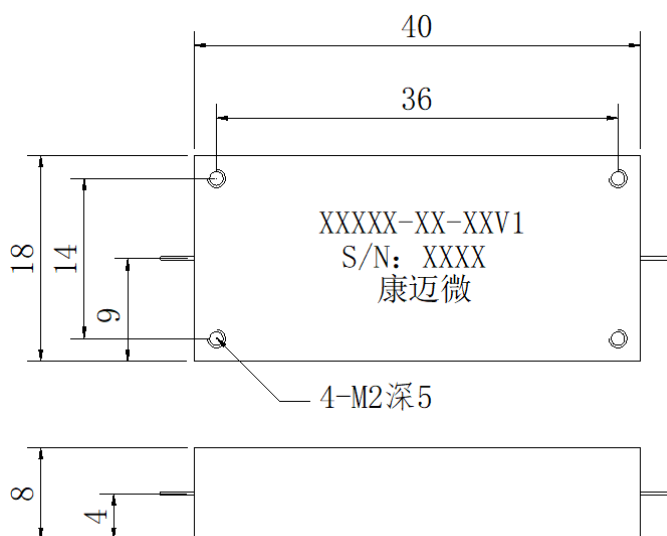

Other parameters

Connector	Pin 0.38mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	5W Design assurance
Product shell material	Aluminium
Operation Temp.	-40~+70°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

