


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	15.36	~	16.54	GHz
Passband IL	/	/			2.0	dB
Ripple	/	/			1.0	dB
Ripple	Arbitrarily 80	MHz			0.4	dB
Rejection	DC-14	GHz $\geq$	65			dB
Rejection	14-15	GHz $\geq$	33			dB
Rejection	17-18	GHz $\geq$	40			dB
Rejection	18-30	GHz $\geq$	60			dBc
Rejection	30-34	GHz $\geq$	50			dB
Passband VSWR	/	/			1.40	

Configuration(mm)

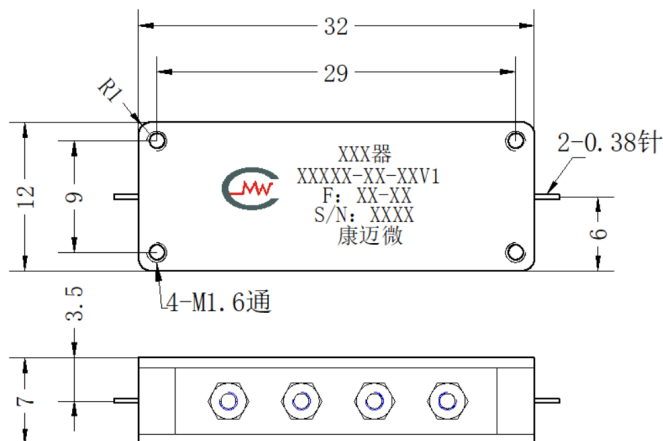

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	Silver plating
Power	10W Design assurance
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance