

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5.85	~	6.75	GHz
Passband IL	/	/			0.5	dB
Ripple	/	/			0.5	dB
Rejection	DC-4.3	GHz $\geq$	40			dBc
Rejection	7.4-13	GHz $\geq$	40			dBc
Passband VSWR	/	/			1.50	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	30W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Reference picture



Configuration(mm)

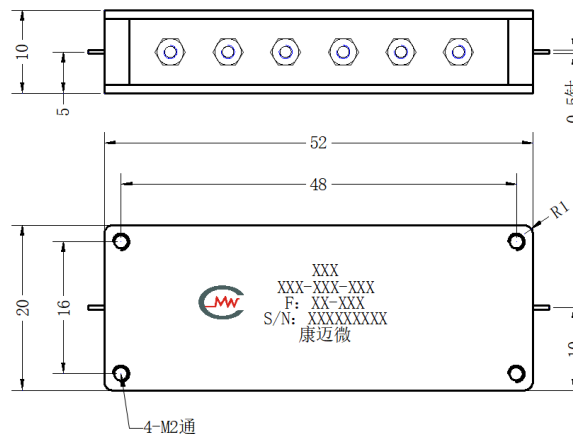

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.
3	/