

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	1	~	30	MHz
IL			1.0	dB
Coupling	9.2	10	10.8	dB
Directivity	20			dB
Main line VSWR			1.3	
Coupled line VSWR			1.3	


Other parameters

Connector	N -F
Connector material	Shell copper
Impedance	50Ω
Surface	Conductive oxidation
Power Capacity	5W Design assurance
Shell Material	Aluminium
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance

Port Definition

Input port	IN	---
Output port	OUT	---
Coupling port	Coupling	---

Configuration(mm)

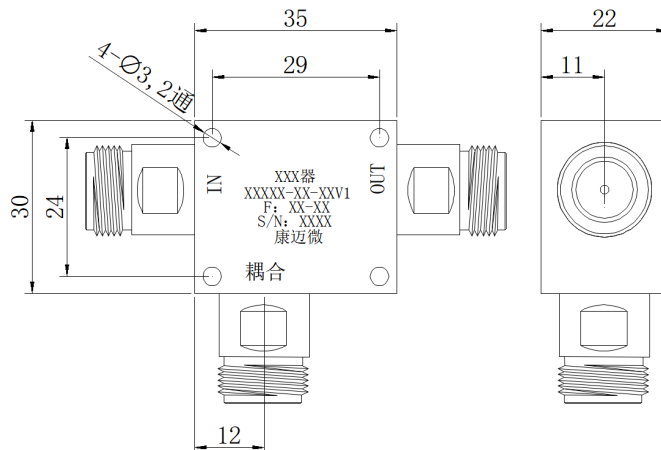

Note

1	Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
2	If the temperature is higher than 125°C, consult with us before ordering.